



Shown with Vanilla linen.



501 NEW LED ADA



FABRIC SCONCE

Design
Sustainability
Value



print this page



email this page to a colleague



installation instructions



interactive submittal drawing

COMPANIONS



FEATURES

- Purpose-built for LED
- Fabric laminated to acrylic and is washable.

ECO INFO

METALS: Aluminum parts have the highest available recycled content for lower embodied energy. All metals are valuable and recyclable at the end of the product's useful life.

For more information see "GENERAL INFO"

FINISHING: Solid, natural metal finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Clear coat finishes are available. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for LEDs using HPF electronic drivers.

MATERIALS

- Fabric and acrylic

LAMPING



1-10W LED array, 1060 lumens, 3000K, 80+ CRI

Driver

Integral HPF electronic driver is 120 volt and is triac dimmable. 0-10V dimming available for 120 & 277V.




501

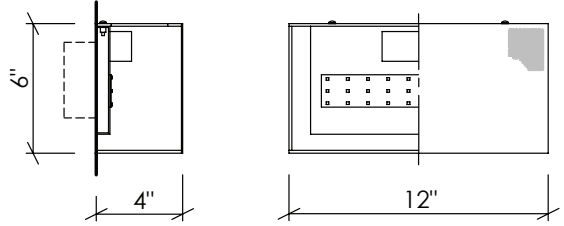


PHOTOMETRICS

Lighting Sciences Report No. L091404204
 Fixture Efficiency: 59 lm/w

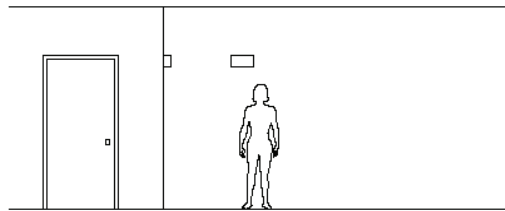

OPTIONAL FABRICS:



Vanilla Linen
VL



Wheat Linen
WL

MOUNTING: Standard J-box or plaster ring

WEIGHT: 4lbs

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail

NOTE: Integral HPF electronic driver is 120 volt and is triac dimmable. 0-10V dimming available for 120 & 277V.

SPEC GUIDE SAMPLE SPEC: 501-LED1/10-120

CAT#	LAMPING	VOLT	OPTION
<input type="checkbox"/> 501	<input type="checkbox"/> LED1/10	<input type="checkbox"/> 120	<input type="checkbox"/> VL Vanilla Linen
		<input type="checkbox"/> 277	<input type="checkbox"/> WL Wheat Linen
		<input type="checkbox"/> 120/277	
		0/10V DIM	



**LIGHTING
FIXTURES**



Our fixtures are handcrafted here in the USA using the highest quality materials.

