

INDIRECT SCONCE

Design
Sustainability
Value



print this page



email this page to a colleague



installation instructions




interactive submittal drawing

DESIGN: DAVID MALMAN



COMPANIONS



FEATURES

- Clean, simple design is ADA compliant.
- Optional graphics & logos.
- Tool-free relamping.

ECO INFO

METALS: Sand cast aluminum end caps are made from 100% recycled aluminum. Other aluminum parts have the highest available recycled content for lower embodied energy and are valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO."

FINISHING: Solid, natural metal finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Clear coat finishes are available. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for compact fluorescent lamps using HPF electronic ballasts.

MATERIALS

- Sand cast aluminum with 100% recycled content, hand finished.
- Solid aluminum shield, hand finished.

FINISHES

SAL Satin Aluminum

MW Matte White

CCP Custom Color Painted finish

Standard metal finishes are hand satined and waxed. Other metal finishes are available. Contact factory.

LAMPING

CF: 1-CF26W DTT, CF32W or CF42WTTT, Gx24q base. Lamps not included.

LED: GU24 base A-19, 12W, 1100 lumens, 3000K and triac dimmable. Supplied with fixture.

BALLAST

CF: Integral electronic HPF, 120V/277V.


LED: Electronic driver is built into the lamp, 120V only.



Shown with Tall Shield & graphics laser cut.

551

INDIRECT SCONCE

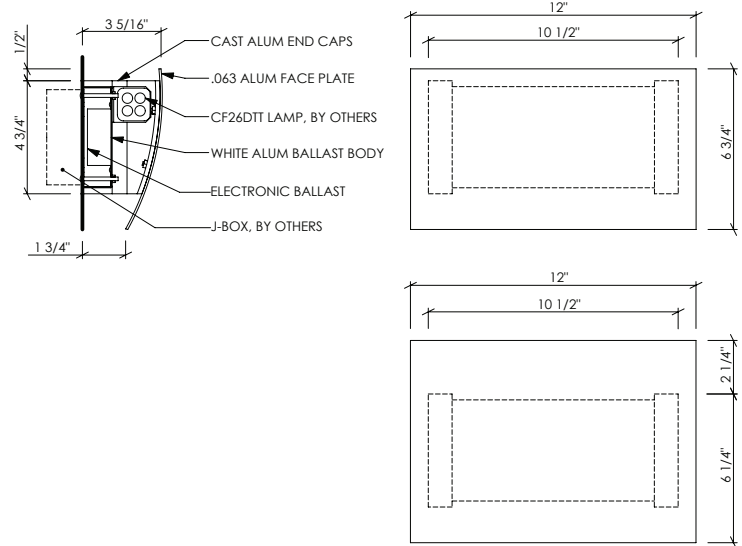

Tall Shield option


OPTIONS

TALL SHIELD: Available with an 8 1/2" high shield. Specify **TS**. Call factory for laser cut graphics.

DIMMING: Lutron and Advance dimming available.

NORMAL POWER FACTOR BALLAST: This fixture is available with an NPF 120 volt electronic ballast only for 26W lamp at a lower cost. Specify **120NPF**.

EMERGENCY BATTERY PACK: Remote mounted EBP, specify **REM**. Not available for **LED**.

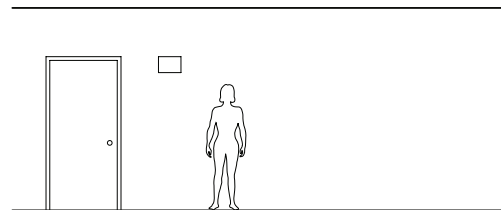

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail
- Laser cut decorative patterns.

NOTE: Standard electronic ballast is multi-volt and multi-wattage. Fixture will accommodate 26, 32 or 42 watt lamps.

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 4 lbs

SPEC GUIDE SAMPLE SPEC: 551-CF1/26-120-SAL

CAT#	-	LAMPING	-	VOLT	-	FINISH	-	OPTION
<input type="checkbox"/> 551		<input type="checkbox"/> CF1/26		<input type="checkbox"/> 120		<input type="checkbox"/> SAL		<input type="checkbox"/> TS
		<input type="checkbox"/> CF1/32		<input type="checkbox"/> 277		<input type="checkbox"/> MW		<input type="checkbox"/> REM
		<input type="checkbox"/> CF1/42				<input type="checkbox"/> CCP		
		<input type="checkbox"/> LED1/12						



999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com



IBEW Labelled

**LIGHTING
FIXTURES**



Our fixtures are handcrafted here in the USA using the highest quality materials.