

311

UP/DOWNLIGHT PENDANT

Design
Sustainability
Value



print this page



email this page to a colleague



installation instructions





interactive submittal drawing



DESIGN: RANDY BORDEN

Shown in Satin Aluminum.



FEATURES

- Unique shape, low profile and high efficiency.
- Strong indirect uplight and soft diffuse downlight.
- Allows for close-to-ceiling applications.

ECO INFO

METALS: Aluminum with the highest available recycled content for lower embodied energy. Aluminum is valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO."

FINISHING: Aluminum is sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for fluorescent lamps using HPF electronic ballasts.

MATERIALS

- Solid aluminum metal work, hand finished.
- Satin ice, clear frosted acrylic lens.

FINISHES

SAL Satin Aluminum

MW Matte White

CCP Custom Color Painted finish

Satin Aluminum is hand satined and waxed.

LAMPING


4-T5/14 or T5/24HO.

Lamps not included.

BALLAST


Integral electronic HPF, 120V/277V.

See "GENERAL INFO" for more detail.

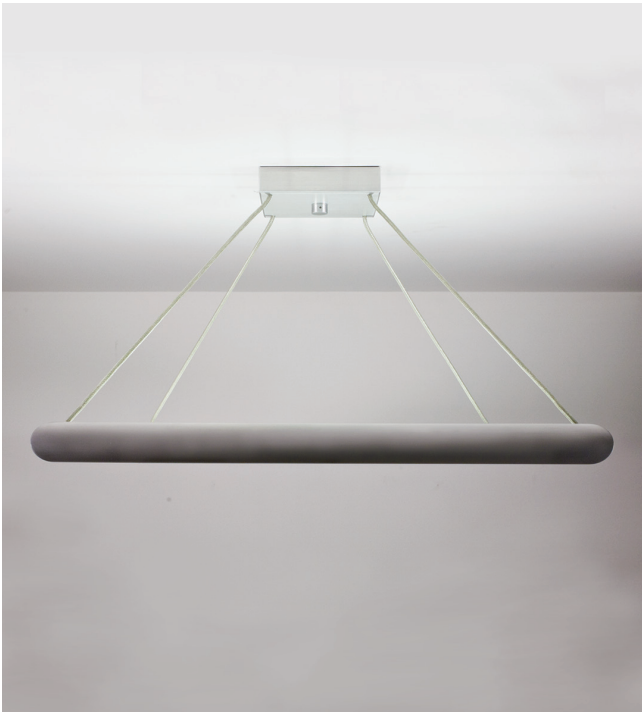

Shown in Satin Aluminum

311

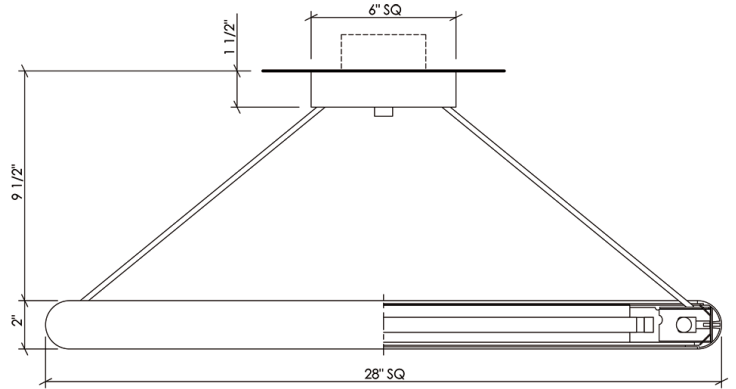

PHOTOMETRICS

Lighting Sciences Report No: 29054

Fixture Efficiency: 82.1%

OPTIONS


DIMMING: Dimming is available with Lutron or Advance dimming ballasts. Call your rep or the factory. Dimming requires a larger canopy.

HANG HEIGHT: Standard overall hang height is 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Minimum recommended is 16".

Call factory for sloped ceiling applications.

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 15lbs

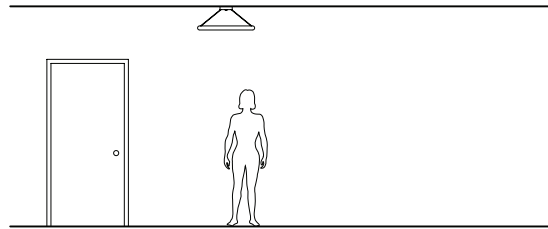

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail

SPEC GUIDE SAMPLE SPEC: 311-T5/24H0-277-SAL-24"0A

CAT#	LAMPING	VOLT	FINISH	OPTION	0A
<input type="checkbox"/> 311	<input type="checkbox"/> 4 - T5/14 <input type="checkbox"/> 4 - T5/24Ho	<input type="checkbox"/> 120 <input type="checkbox"/> 277	<input type="checkbox"/> SAL <input type="checkbox"/> MW <input type="checkbox"/> CCP	<input type="checkbox"/> REM	<input type="checkbox"/> 24" STD <input type="checkbox"/> SPECIFY

