




UPDATED 8/15



sustainability Value



COMPANIONS





FEATURES

- Simple luminous or opaque pendant.
- Purpose-built for LED.
- Companion surface mount available.
- Acrylic cylinder has matte finish inside and out.

ECO INFO

METALS: Aluminum with the highest available recycled content for lower embodied energy. Aluminum is valuable and recyclable at the end of the product's useful life. For more information see "GENERAL INFO"

FINISHING: Solid, natural metal finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Satin Brass is clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for LED HPF drivers.

MATERIALS

344: Solid aluminum metal work, hand finished 345: Extruded white acrylic with a matte finish.

FINISHES

- SAL Satin Aluminum
- MW Matte White
- CCP Custom Color Painted finish

Aluminum finish is hand satined and waxed.


LAMPING

1-9W LED array, 1210 lumens each or 1-14W, 1650 lumens each, both 3000K, 80 CRI. LED arrays are replaceable with quick connects.


Driver

Integral/HPF electronic driver is 120 volt and is triac dimmable. 0-10V dimming available for 120 & 277V.



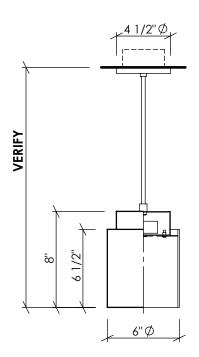

PHOTOMETRICS Light Lab Report No. L091404202 Fixture Efficacy: 75lm/w Tested with a 10W LED rated at 1060lm; new LED is rated at 9W and 1210lm or 15% more. Adjust light levels accordingly.



VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail



OPTIONS

DIMMING: Available electronic 0-10V driver with a dimming range of 100-10%, 120/277V.

STEM: Available with metal stem and swivel canopy, specify **STEM**.

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 4 lbs

SPEC GUIDE SAMPLE SPEC: 160-8-CF1/26-120-SAL

CAT#	- LAMPING	- VOLT	- FINISH	- OPTION
344	🖵 LED1/9	120	SAL	STEM
345	🖵 LED1/14	277	M W	🗅 0-10V DIM
			CCP	

