

UPDATED 8/15

356 LED Optional

LUMINOUS CYLINDER

Design
Sustainability
Value



356 shown in Satin Aluminum.



print this page



email this page to a colleague



installation instructions



interactive submittal drawing



application photos

FEATURES

- Slim, elegant luminous cylinder.
- SJ cord standard; available with metal stem.
- Available with LEDs.

ECO INFO

METALS: Aluminum with the highest available recycled content for lower embodied energy. Aluminum is valuable and recyclable at the end of the products useful life. For more information see "GENERAL INFO"

FINISHING: Aluminum and Antique Brass finishes are sealed with a hand-applied bees wax. No paint or lacquer is used in order to avoid pollution associated with the manufacture and application of these substances. Satin Brass is clear-coated with a very low VOC water-based coating. Paint finishes are low VOC and oven cured.

ENERGY: Designed exclusively for compact fluorescent or LED lamps using HPF electronic ballasts/drivers.

MATERIALS

- Aluminum metal work, hand finished.
- White SJ cord standard. Available in black or with metal stem.
- White acrylic cylinder. Sanded clear acrylic optional.

FINISHES

SAL Satin Aluminum

MW Matte White

PC Polished Chrome

CCP Custom Color Painted finish

Standard metal finishes are hand satined and either waxed or sealed with a water-based clear coat. Other metal finishes are available. Contact factory.

LAMPING

CF: 1-CF18 or 26W DTT Gx24q base.

Lamps not included.

LED: 9W array, 1210 lumens, 3000K & 80 CRI. LED array is included and is replaceable.

BALLAST/DRIVER

CF: Integral canopy-mounted electronic HPF, 120V/277V.

LED: Integral canopy-mounted electronic, 120V only.





999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com



Verasa Resort
Napa, CA
INT DES: CHIL

M356 shown with stem.

356

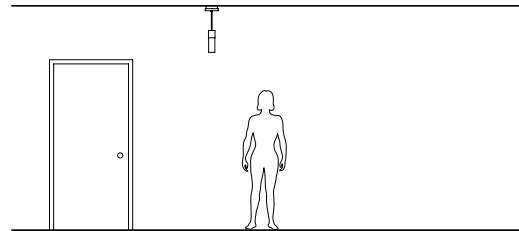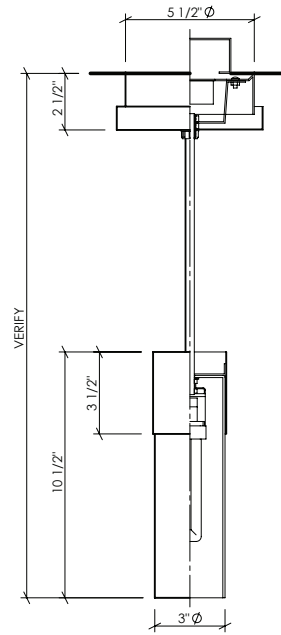

OPTIONS

STEM: Available with a metal stem & swivel canopy, specify STEM.

CLEAR ACRYLIC CYLINDER: Available with clear acrylic diffusing cylinder with a sanded finish, specify CA.

DIMMING: CF: Our standard dimming electronic ballast has range of 100 -15%, 120 volt only for the 26W lamp. Ballast dimmable from any incandescent dimmer. Other dimming ballasts available.

EMERGENCY BATTERY PACK: Remote mounted EBP, specify REM. Not available for LED.

HANG HEIGHT: Standard overall hang height is 24" (ceiling to bottom of fixture). There is an additional charge for hang heights greater than standard. Minimum recommended is 18"

MOUNTING: Standard J-box or plaster ring.

WEIGHT: 6 lbs

VARIATIONS / MODIFICATIONS

- Special finishes
- Addition of decorative detail
- Variation in cylinder diameter

SPEC GUIDE SAMPLE SPEC: 356-CF1/26-120-SAL-STEM-24"

CAT#	LAMPING	VOLT	FINISH	OPTION	QA
<input type="checkbox"/> 356	<input type="checkbox"/> CF1/18 <input type="checkbox"/> CF1/26 <input type="checkbox"/> LED1/9	<input type="checkbox"/> 120 <input type="checkbox"/> 277 <input type="checkbox"/> 120DIM	<input type="checkbox"/> SAL <input type="checkbox"/> MW <input type="checkbox"/> PC <input type="checkbox"/> CCP	<input type="checkbox"/> CA <input type="checkbox"/> STEM <input type="checkbox"/> REM	<input type="checkbox"/> 24" STD <input type="checkbox"/> SPECIFY



999 Montague St • San Leandro, CA 94577 • ph 510.357.0171 • fax 510.357.3832 • www.bordenlighting.com



IBEW Labelled

**LIGHTING
FIXTURES**



Our fixtures are handcrafted here in the USA using the highest quality materials.